
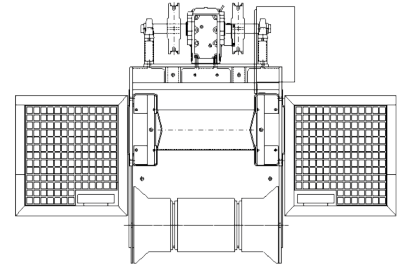


Hide puller, low capacity

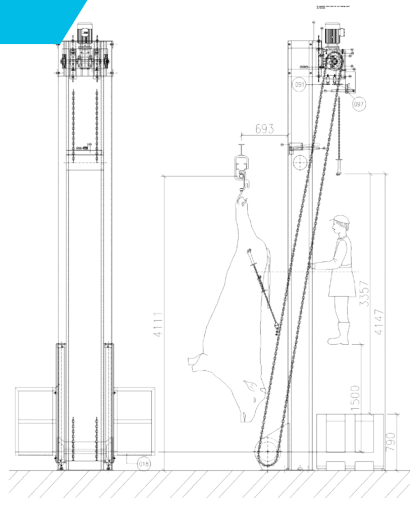

Top-down dehiding - simple and efficient

The Frontmatec hide puller is designed for the top to bottom dehiding of cattle carcasses including head. The hide puller is suitable for dehiding all kinds of cattle in an efficient and ergonomic way.

The hide puller is equipped with two dehiding chains and hide clamps. The hide is pulled off the carcass from top to bottom and is pulled underneath the guide roll. If required, the head can also be dehided. In this case, more height is required. The forelegs do not need securing.

The hide puller is supplied with two stainless steel pneumatically operated elevating platforms. The dehiding chains are attached to the hide flaps with the hide clamps. The cattle must be pre-dehided until below the rear flanks. Once attached, the hide is pulled from the carcass. The hide puller is manually operated with pushbutton. The two employees on the dehiding platforms control the complete dehiding process.

Once the hide is removed, it is manually released from the hide clamps and dropped in a hide container or on a conveyor.

The capacity of the Frontmatec hide puller for top-down dehiding is up to 40 carcasses per hour.

Option

- Manual electrical stimulation

Why the hide puller, low capacity!

- Full stainless steel construction, including pneumatic platforms
- Simple and sturdy construction
- Low maintenance
- Plug and play
- Efficient and ergonomic in use
- Hygienic operation
- Front legs do not need securing
- Head dehiding possible




Safety and legal requirements

The hide puller is CE approved and designed in accordance with the EU and USDA regulations to meet the strictest demand on health and safety.

Technical data

Capacity	
Cattle	Up to 30 carcasses p/h
Veal	Up to 40 carcasses p/h
Material	Stainless steel
Installation	Mounted directly on the floor with chemical anchors
Operation	Manual
Power supply	3x400V/50Hz/4-5.5Kw
Control voltage	24V
Hydraulics	X
Pneumatic	8 bar
Electrical control	Switch box

Technical data may be subject to changes

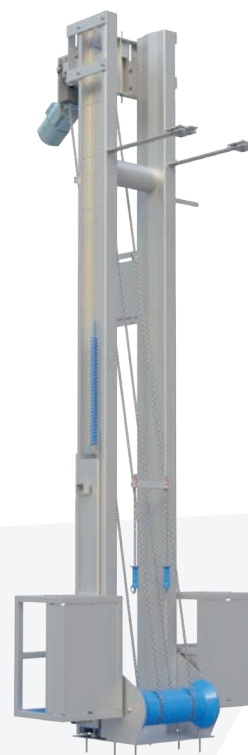

Contact

CN: shanghai@frontmatec.com
Phone: +86 215 859 4850

DK: kolding@frontmatec.com
Phone: +45 763 427 00

NL: rijssen@frontmatec.com
Phone: +31 886 294 000

UK: birmingham@frontmatec.com
Phone: +44 121 313 3564

[frontmatec.com](https://www.frontmatec.com)

DE: beckum@frontmatec.com
Phone: +49 252 185 070

ES: barcelona@frontmatec.com
Phone: +34 932 643 800

RU: moscow@frontmatec.com
Phone: +7 495 424 9559

US: kansascity@frontmatec.com
Phone: +1 816 891 2440